


机械防护栏30系列铝合金型材

代码	材质	表面处理
ATS02	A6063-T6	碱砂氧化
AOB02		
ATS05	A6063-T5	喷砂氧化
AOB05		

☑ L长度公差


$L \leq 1000\text{mm}$




① 切断面未进行氧化处理。

② 最大使用长度: 5800~5850mm;
整条标准长度: 6000~6020mm。


ATS02-H4042




AOB05-4040DG




ATS02-H3030W




ATS05-3030W




ATS02-H3045W




ATS05-3045W




AOB02-H4040F




AOB05-4040F



AOB02-H4040E



AOB02-H4040



型号 代码	规格	L 最小单位0.5	截面尺寸	每米重量Kg/m (理论值)	截面积 (mm ²)	截面惯性矩		抗弯截面模数	
						I_x	I_y	$W_{x\max}$ (mm ³)	$W_{y\max}$ (mm ³)
ATS02	H4042	50~6000	40×42	1.69	597.51	10.39×10^4	12.53×10^4	4743.07	6265.72
	H3030W		30×30	0.91	322.09	2.46×10^4	3.16×10^4	1557.49	1990.44
	H3045W		30×45	1.32	464.89	7.20×10^4	4.69×10^4	3200.71	2933.49
AOB02	H4040	50~6000	40×40	2.05	724.84	11.58×10^4	11.58×10^4	5792.15	5792.15
	H4040E		40×40	1.61	566.13	9.07×10^4	9.07×10^4	4534.00	4534.00
	H4040F		40×40	1.54	565.33	9.09×10^4	9.09×10^4	4543.50	4543.50
ATS05	3030W	50~6000	30×30	0.86	303.08	9.02×10^4	10.67×10^4	1466.81	1951.66
	3045W		30×45	1.15	405.49	2.32×10^4	3.04×10^4	2912.87	2998.30
AOB05	4040DG	50~6000	40×40	1.43	503.54	6.57×10^4	4.37×10^4	4508.25	5198.04
	4040F		40×40	1.50	535.91	8.28×10^4	8.28×10^4	4139.80	4139.80



请按图示订货

型号	规格	L 最小单位0.5	截面尺寸
ATS02	H4042	50~6000	40×42
	H3030W	50~6000	30×30

ATS02—H4042—L350

☑ 可选加工

型号	规格	L 最小单位0.5	可选加工 代码
ATS02	H4042	50~6000	LM/RM/DM
	H3030W	50~6000	DM

ATS02—H4042—L350—RM



可选加工

☑ 端面螺孔加工

代码	技术说明
	变更通孔为螺孔
LM(左端面)	选型方法 LM/RM/DM
	① ATS02-H4042/AOB05-4040DG 的Ø5通孔变更为螺孔M6深15。
RM(右端面)	① Ø6.8通孔变更为螺孔M8深20。
	DM(双端面)


① 可选加工见P571~576。

机械防护栏30/40系列使用示例



机械防护栏安装示例

用于机械设备安全防护作用。

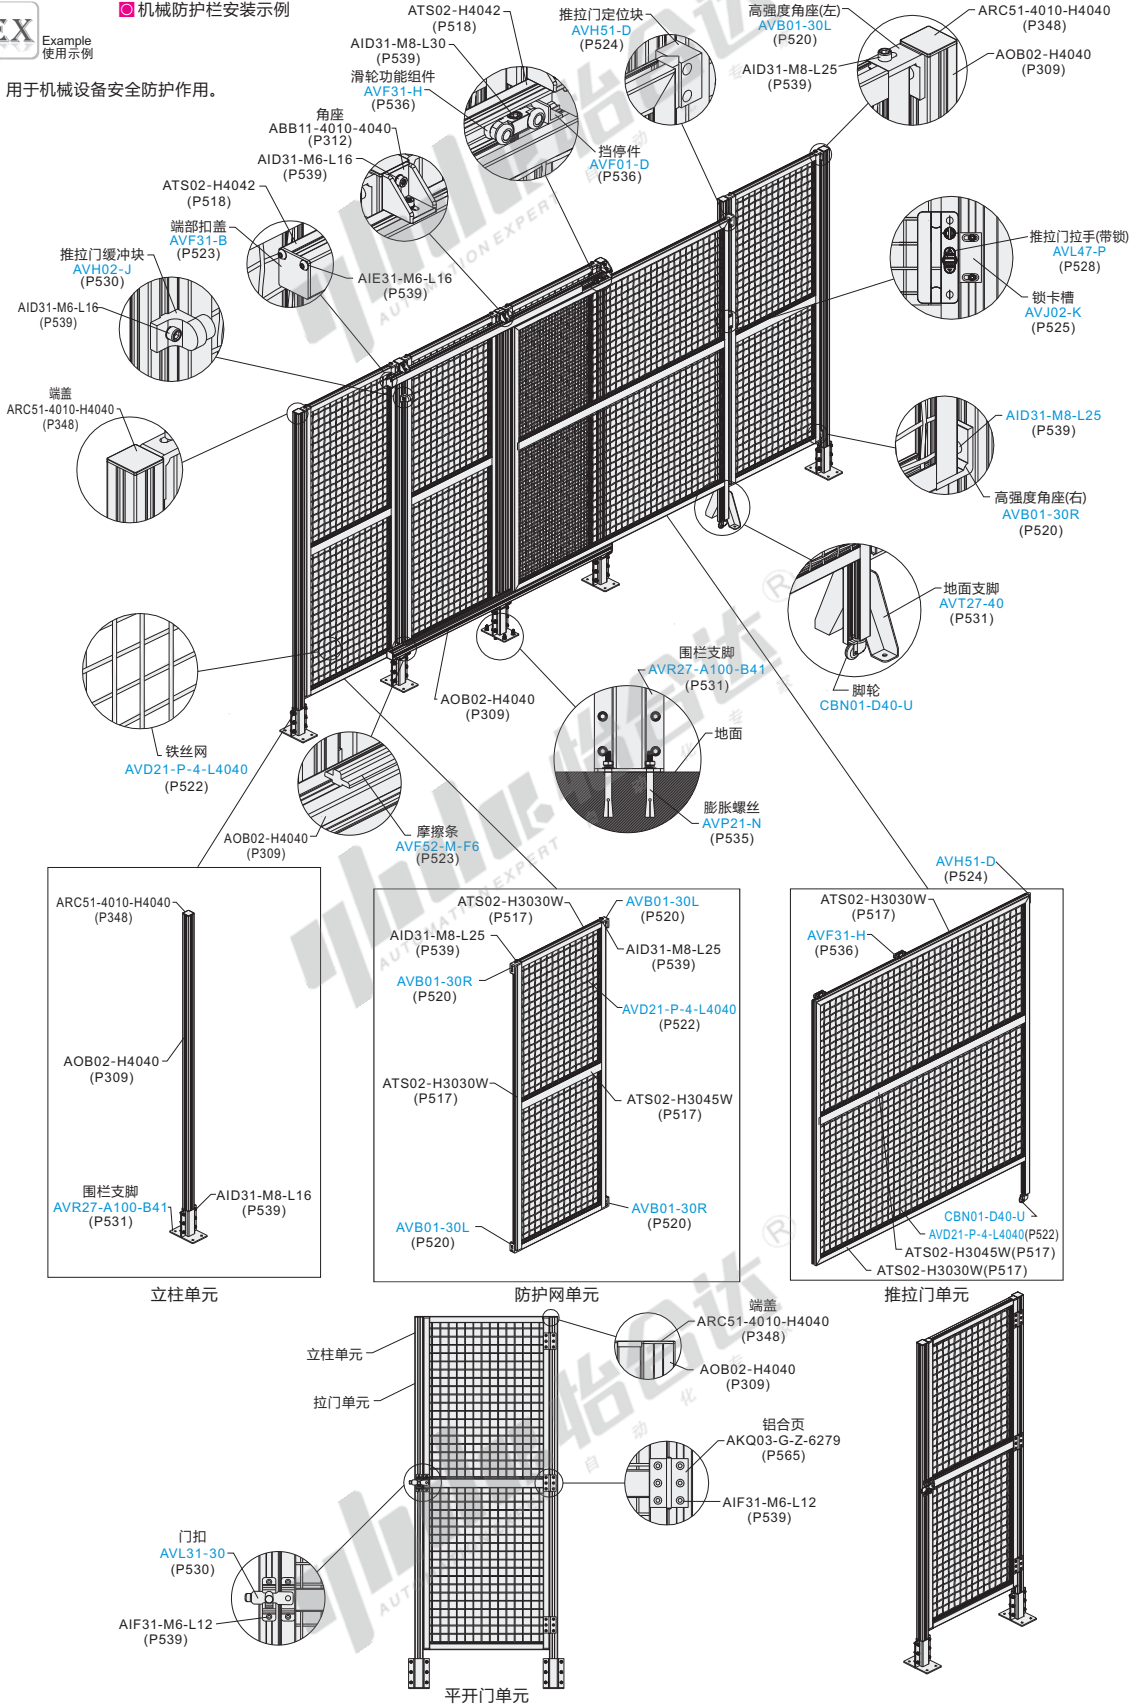

机械防护栏系列