


一端一阶一端二阶型·A型

中部公差h7型

30度梯形丝杠

代码	类型	螺纹旋向	材质		表面处理
			国标	相当	
LJF12	一端一阶一端二阶 A型	一端左旋	45	S45C	发黑
LJF16		一端右旋	Y1Cr18Ni9	SUS303	—

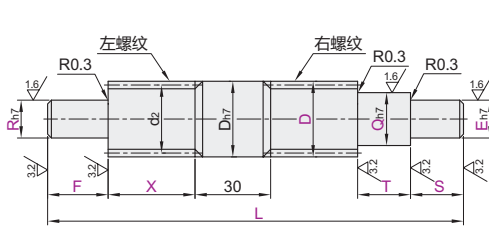

视角标准：第一视角

型号	最小单位0.5			R-Q 选择	最小单位0.5		螺距 P	有效直径 d ₂	螺纹牙根 直径(min)	螺纹升角
	代码	D	L		F-T-S	E				
LJF12 LJF16	14	70~1000		8 9 10	Q/2 ≤ E ≤ Q-1.5	请根据使用要求指定尺寸。	3	12.5	10.1	4°22'
	16	80~1200		8 9 10 12			3	14.5	12.1	3°46'
	20	120~1200	3 ≤ F ≤ R × 8	9 10 12 14 15			4	18	15.1	4°03'
	25		3 ≤ T ≤ Q × 8	10 12 14 15 16 17			5	22.5	19	4°03'
	28		3 ≤ S ≤ E × 8	12 14 15 16 17 20			5	25.5	22	3°34'
	32		150~1200				12 14 15 16 17 20 25	6	29	24.5



可选加工

代码	增加挡圈槽	增加两平面	增加端面粗牙螺孔	增加外螺纹	增加四平面	增加键槽																																																																																																												
	AR() (R部) AE() (E部)	SE() (E部) SR() (R部)	MR() (R部) ME() (E部)	BQ() (Q部) BR() (R部)	ZE() (E部) ZR() (R部)	KQ() (Q部) KE() (E部) KR() (R部)																																																																																																												
技术说明	选型方法 AR13.3 ① 最小单位0.1 <table border="1"> <thead> <tr> <th>RE</th> <th>e公差</th> <th>m^{0.14}</th> <th>n</th> </tr> </thead> <tbody> <tr><td>7 4</td><td></td><td>0.7</td><td>n ≥ 1.2</td></tr> <tr><td>8 5</td><td>+0.075</td><td></td><td></td></tr> <tr><td>9 6</td><td></td><td>0.9</td><td></td></tr> <tr><td>10 9.6</td><td>0.09</td><td></td><td></td></tr> <tr><td>12 11.5</td><td></td><td>1.15</td><td>n ≥ 1.5</td></tr> <tr><td>14 13.4</td><td>0.11</td><td></td><td></td></tr> <tr><td>15 14.3</td><td></td><td></td><td></td></tr> <tr><td>16 15.2</td><td></td><td></td><td></td></tr> <tr><td>17 16.2</td><td></td><td></td><td></td></tr> <tr><td>20 19</td><td></td><td>1.35</td><td></td></tr> <tr><td>25 23.9</td><td>0.21</td><td></td><td></td></tr> <tr><td>30 28.6</td><td></td><td>1.65</td><td></td></tr> <tr><td>35 33</td><td></td><td></td><td></td></tr> <tr><td>40 38</td><td>0.25</td><td>1.9</td><td>n ≥ 2</td></tr> </tbody> </table>	RE	e公差	m ^{0.14}	n	7 4		0.7	n ≥ 1.2	8 5	+0.075			9 6		0.9		10 9.6	0.09			12 11.5		1.15	n ≥ 1.5	14 13.4	0.11			15 14.3				16 15.2				17 16.2				20 19		1.35		25 23.9	0.21			30 28.6		1.65		35 33				40 38	0.25	1.9	n ≥ 2	选型方法 SE3-SW10-SY7 ① 最小单位0.5	选型方法 MR24 <table border="1"> <thead> <tr> <th>R-E</th> <th>ME-MR选择</th> </tr> </thead> <tbody> <tr><td>5 3</td><td></td></tr> <tr><td>6 3</td><td></td></tr> <tr><td>7-8 3-4</td><td></td></tr> <tr><td>9-10 3-4-5</td><td></td></tr> <tr><td>11-12 3-4-5-6</td><td></td></tr> <tr><td>13-15 3-4-5-6-8</td><td></td></tr> <tr><td>16-17 3-4-5-6-8-10</td><td></td></tr> <tr><td>18-24 3-4-5-6-8-10-12</td><td></td></tr> <tr><td>25-30 3-4-5-6-8-10-12-16</td><td></td></tr> <tr><td>31-39 3-4-5-6-8-10-12-16-20</td><td></td></tr> <tr><td>40 3-4-5-6-8-10-12-16-20-24-30</td><td></td></tr> </tbody> </table>	R-E	ME-MR选择	5 3		6 3		7-8 3-4		9-10 3-4-5		11-12 3-4-5-6		13-15 3-4-5-6-8		16-17 3-4-5-6-8-10		18-24 3-4-5-6-8-10-12		25-30 3-4-5-6-8-10-12-16		31-39 3-4-5-6-8-10-12-16-20		40 3-4-5-6-8-10-12-16-20-24-30		选型方法 BR20 ① BQ, BR ≤ F, T-螺距 × 3	选型方法 ZE12-W10-A8 ① 最小单位0.5 ② A=5-20 ZE=E, ZR=R (W最小单位1) <table border="1"> <thead> <tr> <th>ZE</th> <th>ZR</th> <th>W</th> </tr> </thead> <tbody> <tr><td>6-10</td><td>5-8</td><td></td></tr> <tr><td>11-14</td><td>8-10</td><td></td></tr> <tr><td>15-19</td><td>10-14</td><td></td></tr> <tr><td>20-25</td><td>14-20</td><td></td></tr> <tr><td>26-30</td><td>19-24</td><td></td></tr> <tr><td>31-35</td><td>22-28</td><td></td></tr> <tr><td>36-40</td><td>26-30</td><td></td></tr> </tbody> </table>	ZE	ZR	W	6-10	5-8		11-14	8-10		15-19	10-14		20-25	14-20		26-30	19-24		31-35	22-28		36-40	26-30		选型方法 KQ8-C10 ① 最小单位0.5 ② KQ(KE, KR)=0时, 键槽形状如右图:
	RE	e公差	m ^{0.14}	n																																																																																																														
7 4		0.7	n ≥ 1.2																																																																																																															
8 5	+0.075																																																																																																																	
9 6		0.9																																																																																																																
10 9.6	0.09																																																																																																																	
12 11.5		1.15	n ≥ 1.5																																																																																																															
14 13.4	0.11																																																																																																																	
15 14.3																																																																																																																		
16 15.2																																																																																																																		
17 16.2																																																																																																																		
20 19		1.35																																																																																																																
25 23.9	0.21																																																																																																																	
30 28.6		1.65																																																																																																																
35 33																																																																																																																		
40 38	0.25	1.9	n ≥ 2																																																																																																															
R-E	ME-MR选择																																																																																																																	
5 3																																																																																																																		
6 3																																																																																																																		
7-8 3-4																																																																																																																		
9-10 3-4-5																																																																																																																		
11-12 3-4-5-6																																																																																																																		
13-15 3-4-5-6-8																																																																																																																		
16-17 3-4-5-6-8-10																																																																																																																		
18-24 3-4-5-6-8-10-12																																																																																																																		
25-30 3-4-5-6-8-10-12-16																																																																																																																		
31-39 3-4-5-6-8-10-12-16-20																																																																																																																		
40 3-4-5-6-8-10-12-16-20-24-30																																																																																																																		
ZE	ZR	W																																																																																																																
6-10	5-8																																																																																																																	
11-14	8-10																																																																																																																	
15-19	10-14																																																																																																																	
20-25	14-20																																																																																																																	
26-30	19-24																																																																																																																	
31-35	22-28																																																																																																																	
36-40	26-30																																																																																																																	



请按图示订货

型号	L	F-T-S	R-Q	E	X
LJF12	70~1000	3 ≤ F ≤ R × 8	8 9 10	Q/2 ≤ E ≤ Q-1.5	请根据使用要求指定尺寸。
LJF16	80~1200	3 ≤ Q × 8	8 9 10 12		
LJF16	120~1200	3 ≤ E × 8	9 10 12 14 15		

LJF12—D14—L150—F15—T10—S20—R10—Q10—E7—X50

可选加工

型号	L	F-T-S	R-Q	E	X	可选加工代码
LJF12	70~1000	3 ≤ F ≤ R × 8	8 9 10	Q/2 ≤ E ≤ Q-1.5	请根据使用要求指定尺寸。	MR()
LJF16	80~1200	3 ≤ Q × 8	8 9 10 12			ME()
LJF16	120~1200	3 ≤ E × 8	9 10 12 14 15			ME()

LJF12—D14—L150—F15—T10—S20—R10—Q10—E7—X50—MR5



优惠价

数量	1~4	5~
价格	100%	另行报价

未税价(元)



交货期

10