


# 螺钉夹紧型 · 标准型/加长型/短型

铝合金

## 减振式联轴器

代码	类型		材质		附件
			主体	间隔环	
DBN67	螺钉夹紧型	标准型	铝合金	FKM	内六角圆柱头螺钉
DBN62		加长型			
DBN63		短型			

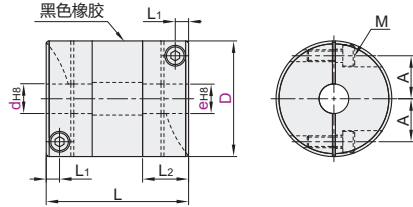

视角标准：第一视角

### 标准型

型号		d-e							
代码	D								
DBN67	15	d	3	4	4.5	5	6		
		e	5.6	4.5.6	5	5.6	6		
	19	d	4	5	6	6.35	6		
		e	5.8	5.6.7.8	6.6.35.7.8	8	6		
	25	d	5	6	6.35	8	10	12	
		e	6.8	6.8.10.11.12	8.10	8.10.11.12	10.12	12	
	30	d	8	10	11	12	14	15	
		e	8.10.11.12.14.15	10.11.12.14.15	12.12.14.15	14.15	15		
	34	d	8	10	11	12	14	15	16
		e	8.10.11.12.14.15	10.11.12.14.15	11.12	12.14.15	14.15	15	16
	39	d	10	12	14	15	16	17	20
		e	10.11.12.14.15.16	12.14.15.16.19.20	14.15.16	15.16.19	16.17.20		
44	d	12	14	15	16	17	19	20	
	e	12.14.16.19	14.15.16.19	15.16.19.20	16.19	17.20	20		
56	d	12	19	20	24	25			
	e	15.19.20.25	20.24	20.25	25	25			

### 短型

型号		d-e							
代码	D								
DBN63	15	d	3	4	4.5	5	6		
		e	5.6	4.5.6	5	5.6	6		
	19	d	4	5	6	6.35	8		
		e	5	5.6.7.8	6.6.35.8	8	8		
	25	d	5	6	6.35	8	10	12	
		e	6.8	6.8.10	8.10	8.10	10.12	12	
	30	d	8	10	11	12	14	15	
		e	8.10.11.12.14.15	10.11.12	12	12.14.15	14.15	15	
	34	d	8	10	11	12	14	15	16
		e	8.10.11.12.14.15	10.11.12	11.12	12.14.15	14.15	15	16
	39	d	10	12	14	15	16	17	20
		e	10.11.12.14.15.16	12.14.15	14.15	15.16	16.17.20		

### 加长型

型号		d-e					
代码	D						
DBN62	15	d	3	5			
		e	5	5.6			
	19	d	4	5	6	6.35	8
		e	5	5.6.7.8	6.6.35.8	8	8
	25	d	5	6	6.35	8	10
		e	8	8.10	8	8.10.11.12	10.12
DBN62	30	d	8	10	11	12	
		e	8.10.11.12.14.15	10.11.14	12.14		
	34	d	8	10	11	12	14
		e	8.10.12.14	11.14	12	14	15
	39	d	10	12	14	15	
		e	10.12.14	14	15	19	



### 加长型

型号		d-e					
代码	D						
DBN62	D25	d	5				
		e	8				

DBN62—D25—d5—e8



● 优惠价  
数量 1~9 10~  
价格 100% 另行报价



型号		尺寸						性能				容许安装偏差			重量	
代码	D	L	L1	L2	A	M	锁紧扭矩 (N·m)	额定扭矩 (N·m)	最大扭矩 (N·m)	最高转速 (r/min)	惯性力矩 (kg·m <sup>2</sup> )	静态扭转刚度 (N·m/rad)	径向 (mm)	角向 (°)	轴向 (mm)	(g)
标准型 DBN67	15	23	2.15	6.5	5	M1.6	0.25	1.1	2.2	42000	2.6×10 <sup>-7</sup>	110	0.15	1.5	±0.2	9
	19	26	2.65	7.7	6.5	M2	0.5	2.1	4.2	33000	7.6×10 <sup>-7</sup>	240				15
	25	32	3.25	9.5	9	M2.5	1	4	8	25000	2.7×10 <sup>-6</sup>	390				29
	30	36	4	11	11	M3	1.5	6.3	12.6	21000	6.3×10 <sup>-6</sup>	590				45
	34	38	12	12.25	8			16	18000	1.2×10 <sup>-5</sup>	890	66				
	39	48	4.5	15.5	14.5	M4	2.5	13.5	27	16000	2.5×10 <sup>-5</sup>	1100				105
加长型 DBN62	15	30	2.15	6.5	5	M1.6	0.25	1.1	2.2	42000	3.6×10 <sup>-7</sup>	82	0.15	1.5	±0.2	11
	19	34	2.65	7.7	6.5	M2	0.5	2.1	4.2	33000	1×10 <sup>-6</sup>	210				20
	25	42	3.25	9.5	9	M2.5	1	4	8	25000	3.8×10 <sup>-6</sup>	300				40
	30	42	4	11	11	M3	1.5	6.3	12.6	21000	7.6×10 <sup>-6</sup>	540				56
	34	44	12	12.25	8			16	18000	1.4×10 <sup>-5</sup>	640	78				
	39	55	4.5	15.5	14.5	M4	2.5	13.5	27	16000	2.9×10 <sup>-5</sup>	950				122
短型 DBN63	15	18	2.15	6.5	5	M1.6	0.25	0.5	1	42000	2.1×10 <sup>-7</sup>	64	0.15	1.5	±0.2	7
	19	20	2.65	7.7	6.5	M2	0.5	0.8	1.6	33000	5.9×10 <sup>-7</sup>	170				12
	25	27	3.25	9.5	9	M2.5	1	2.3	4.6	25000	2.4×10 <sup>-6</sup>	290				24
	30	30	4	11	11	M3	1.5	3.3	6.6	21000	5.2×10 <sup>-6</sup>	430				38
	34	35	12	12.25	5.5			11	18000	1.1×10 <sup>-5</sup>	800	61				
	39	40	4.5	15.5	14.5	M4	2.5	7	14	16000	2.1×10 <sup>-5</sup>	930				90

① 惯性力矩和重量按最大孔计算！

联万  
轴器  
节

F1